

serie


UR-12

UR-14



**UNIÓN UNIVERSAL
CON AMARRE INDEPENDIENTE EN AMBOS LADOS**

*UNIVERSAL COUPLING WITH INDEPENDENT CLAMPING
ON BOTH SIDES*

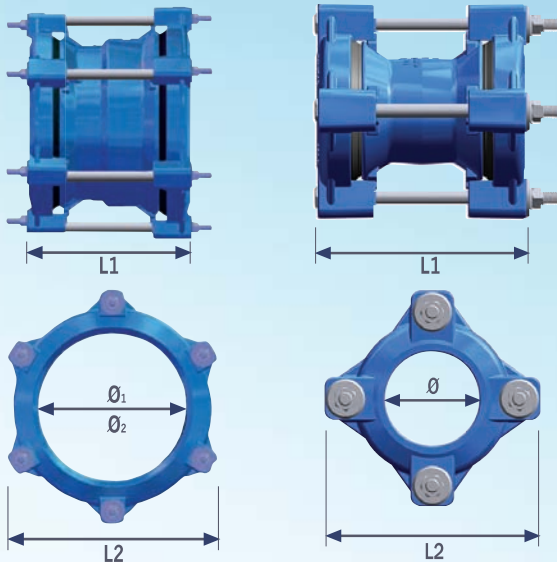

REF.	DN	Ø	L1	L2
UR-12-DN050	50	60-80	186	190
UR-12-DN065	60/65	70-90	186	200
UR-12-DN080	80	88-113	186	223
UR-12-DN100	100	107-132	186	242
UR-12-DN125	125	133-159	206	269
UR-12-DN150	150	159-184	206	296
UR-12-DN175	175	165-195	222	317
UR-12-DN200-A	200	194-226	222	348
UR-12-DN200	200	216-246	222	368
UR-12-DN250-A	250	244-276	242	398
UR-12-DN250	250	266-297	242	419
UR-12-DN300	300	315-345	242	469
UR-12-DN300-A	300	345-375	242	499
UR-12-DN350	350	375-405	242	529
UR-12-DN400	400	400-435	292	565
UR-12-DN400-A	400	435-470	292	600
UR-12-DN450	450	475-510	292	640
UR-12-DN500-A	500	499-534	292	665
UR-12-DN500	500	530-565	292	695
UR-12-DN600	600	610-645	292	775
UR-12-DN600-A	600	645-680	292	810
UR-12-DN700	700	710-745	300	895
UR-12-DN800	800	810-845	300	995
UR-12-DN900	900	913-949	350	1115
UR-12-DN1000	1000	1016-1052	350	1218
UR-12-DN1100-A	1100	1108-1133	350	1299
UR-12-DN1100	1100	1142-1167	350	1333
UR-12-DN1200-A	1200	1209-1234	350	1400
UR-12-DN1200	1200	1245-1270	350	1436
UR-12-DN1400-A	1400	1412-1437	350	1603
UR-12-DN1400	1400	1452-1477	350	1643

REF.	DN	Ø ₁ / Ø ₂	L1	L2
UR-14-DN200	200	194-226 / 216-246	255	368
UR-14-DN250	250	244-276 / 266-297	255	419
UR-14-DN300	300	315-345 / 345-375	255	499
UR-14-DN350	350	375-405 / 400-435	295	565
UR-14-DN400	400	400-435 / 435-470	302	600
UR-14-DN450	450	475-510 / 530-565	302	695
UR-14-DN500	500	499-534 / 530-565	302	695
UR-14-DN500-A	500	530-565 / 575-610	302	740
UR-14-DN500-B	500	575-610 / 610-645	302	775
UR-14-DN600	600	610-645 / 645-680	302	810

- Amplia gama de diámetros que cubre tubos entre 60 y 1477 mm.
- Adecuado para unir tubos de presión rígidos tales como fundición, acero, PVC, fibrocemento, etc.
- Presión de trabajo PN-16.
- Fundición nodular GGG-50 (DN-50 / DN-800). Acero (DN-900 / DN-1400).
- Revestimiento EPOXI de 250µ de media.
- Tornillería con recubrimiento GEOMET y juntas de goma EPDM.
- Posibilidad de equipamiento con tornillería inoxidable.

- Wide range of diameters covering pipes from 60 to 1477 millimeters.
- Suitable for joining pipes of different rigid materials, such as cast iron, stainless steel, PVC, asbestos cement and so on.
- PN-16 operating pressure.
- GGG-50 nodular cast iron (DN-50 / DN-800). Steel (DN-900 / DN-1400).
- 250 µ EPOXY coating in average.
- Equipped with GEOMET coated bolts, nuts and washers, and EPDM rubber seals.
- Optionally on demand equipped with stainless steel bolts.

UR-cast
Water Fittings

www.ur-cast.com

Tfno: (+34) 945 200 466 - Fax: (+34) 945 249 867

C/ Urartea nº 15-17, pab. 6-10, P. I. ALI GOBEO / 01010 VITORIA-GASTEIZ / ÁLAVA (Spain)