


serie
UR-13



BRIDA UNIVERSAL CON TALÓN

UNIVERSAL FLANGE WITH STOP

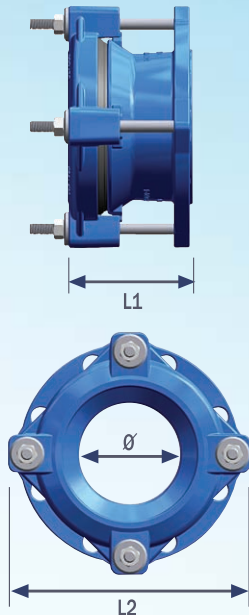

REF.	DN	Ø	L1	L2
UR-13-DN050	50	60-80	145	190
UR-13-DN065	60/65	70-90	145	200
UR-13-DN080	80	88-113	150	223
UR-13-DN100	100	107-132	125	242
UR-13-DN125	125	133-159	140	269
UR-13-DN150	150	159-184	175	296
UR-13-DN175	150/175	165-195	183	317
UR-13-DN200-A	200	194-226	183	354
UR-13-DN200	200	216-246	183	368
UR-13-DN250-A	250	244-276	158	400
UR-13-DN250	250	266-297	158	419
UR-13-DN300	300	315-345	158	469
UR-13-DN300-A	300	345-375	200	499
UR-13-DN350-A	350	353-387	158	529
UR-13-DN350	350	375-405	200	529
UR-13-DN400	400	400-435	209	565
UR-13-DN400-A	400	435-470	298	600
UR-13-DN400-B	400	470-505	304	645
UR-13-DN450	450	475-510	298	640
UR-13-DN500-A	500	499-534	208	665
UR-13-DN500	500	530-565	208	695
UR-13-DN500-B	500	575-610	208	695
UR-13-DN600	600	610-645	208	775
UR-13-DN600-A	600	645-680	298	810
UR-13-DN700	700	710-745	220	910
UR-13-DN700-A	700	758-793	306	964
UR-13-DN800	800	810-845	225	1025
UR-13-DN800-A	800	867-904	306	1.075
UR-13-DN900	900	913-949	250	1115
UR-13-DN1000	1000	1016-1052	250	1230
UR-13-DN1100-A	1100	1108-1133	250	1340
UR-13-DN1100	1100	1142-1167	250	1340
UR-13-DN1200-A	1200	1209-1234	250	1455
UR-13-DN1200	1200	1245-1270	250	1455
UR-13-DN1400-A	1400	1412-1437	250	1675
UR-13-DN1400	1400	1452-1477	250	1675

- Amplia gama de diámetros que cubre tubos entre 60 y 1477mm.
- Adecuado para unir tubos de presión rígidos tales como fundición, acero, PVC, fibrocemento, etc.
- Presión de trabajo PN-10 y PN-16.
- Barrenado:
 - EN 1092-2 PN10/PN16
 - ANSI-150 hasta DN-400
 - BSTD hasta DN-400 (excepto DN-250)
- Fundición nodular GGG-50 (DN-50 / DN-800).
- Acero (DN-900 / DN-1400).
- Revestimiento EPOXI de 250µ de media.
- Tornillería con recubrimiento GEOMET y juntas de goma EPDM.
- Posibilidad de equipamiento con tornillería inoxidable.

- Wide range of diameters covering pipes from 60 to 1477 millimeters.
- Suitable for joining pipes of different rigid materials, such as cast iron, stainless steel, PVC, asbestos cement and so on.
- PN-10 and PN-16 operating pressure.
- Flanges:
 - According to EN 1092-2 PN10/PN16
 - According to ANSI up to DN-400
 - According to BSTD up to DN-400 (except for DN-250)
- GGG-50 nodular cast iron (DN-50 / DN-800).
- Steel (DN-900 / DN-1400).
- 250µ EPOXY coating in average.
- Equipped with GEOMET coated bolts, nuts and washers, and EPDM rubber seals.
- Optionally on demand equipped with stainless steel bolts.

UR-cast
Water Fittings

www.ur-cast.com

Tfno: (+34) 945 200 466 - Fax: (+34) 945 249 867

C/ Urartea nº 15-17, pab. 6-10, P. I. ALI GOBEO / 01010 VITORIA-GASTEIZ / ÁLAVA (Spain)