


serie
UR-33



COLLARÍN SALIDA BRIDA EN 2 CUERPOS PARA TUBO DE FUNDICIÓN DÚCTIL

INTAKE RING WITH FLANGED OUTLET
FOR DUCTILE IRON PIPES

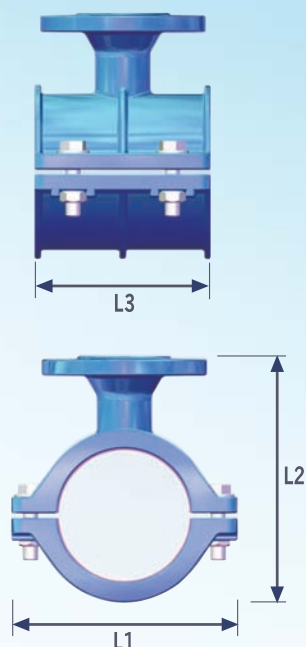

REF.	DN tubo Pipe DN	Salida Outlet	L1	L2	L3
UR-33-DN065-040	DN-65	DN-40	165	185	140
UR-33-DN065-050	DN-65	DN-50	165	195	140
UR-33-DN065-065	DN-65	DN-65	165	205	140
UR-33-DN080-040	DN-80	DN-40	185	200	150
UR-33-DN080-050	DN-80	DN-50	185	210	150
UR-33-DN080-065	DN-80	DN-60/65	185	220	150
UR-33-DN100-040	DN-100	DN-40	205	220	160
UR-33-DN100-050	DN-100	DN-50	205	230	160
UR-33-DN100-065	DN-100	DN-60/65	205	240	160
UR-33-DN100-080	DN-100	DN-80	205	250	160
UR-33-DN125-040	DN-125	DN-40	250	246	180
UR-33-DN125-050	DN-125	DN-50	250	256	180
UR-33-DN125-065	DN-125	DN-60/65	250	266	180
UR-33-DN125-080	DN-125	DN-80	250	276	180
UR-33-DN125-100	DN-125	DN-100	250	281	180
UR-33-DN150-040	DN-150	DN-40	275	274	210
UR-33-DN150-050	DN-150	DN-50	275	284	210
UR-33-DN150-065	DN-150	DN-60/65	275	294	210
UR-33-DN150-080	DN-150	DN-80	275	304	210
UR-33-DN150-100	DN-150	DN-100	275	309	210
UR-33-DN200-040	DN-200	DN-40	330	328	210
UR-33-DN200-050	DN-200	DN-50	330	338	270
UR-33-DN200-080	DN-200	DN-80	330	358	270
UR-33-DN200-100	DN-200	DN-100	330	363	270
UR-33-DN200-150	DN-200	DN-150	330	373	270
UR-33-DN250-040	DN-250	DN-40	380	378	270
UR-33-DN250-050	DN-250	DN-50	380	388	270
UR-33-DN250-080	DN-250	DN-80	380	408	270
UR-33-DN250-100	DN-250	DN-100	380	413	270
UR-33-DN250-150	DN-250	DN-150	380	423	270
UR-33-DN300-040	DN-300	DN-40	435	430	270
UR-33-DN300-050	DN-300	DN-50	435	440	270
UR-33-DN300-080	DN-300	DN-80	435	460	270
UR-33-DN300-100	DN-300	DN-100	435	465	270
UR-33-DN300-150	DN-300	DN-150	435	475	270

- Amplia gama de diámetros que cubre tubos entre DN-65 y DN-300.
- Mecanismo de ajuste máximo del tornillo consiguiendo la estanqueidad.
- Presión de trabajo PN-16.
- Fundición nodular GGG-50.
- Revestimiento EPOXI de 250 μ de media.
- Tornillería con recubrimiento GEOMET y juntas de goma EPDM.

- Wide range of diameters covering pipes from DN-65 to DN-300.
- Maximum bolt adjustment mechanism to achieve leaktighness.
- PN-16 operating pressure.
- GGG-50 nodular cast iron.
- 250 μ EPOXY average coating.
- Equipped with GEOMET coated bolts, nuts and washers, and EPDM rubber seals.

UR-cast
Water Fittings

www.ur-cast.com

Tfno: (+34) 945 200 466 - Fax: (+34) 945 249 867

C/ Urarteaga nº 15-17, pab. 6-10, P. I. ALI GOBEO / 01010 VITORIA-GASTEIZ / ÁLAVA (Spain)